


PTFE extruded tubes

Extruded tubes are supplied in standard length of 2 m up to nominal diameters of 80 mm, and 1 m for larger diameters.

Available upon request:

- extruded tubes in different length and diameters
- centreless-ground extruded tubes
- extruded tubes in standard filled grades

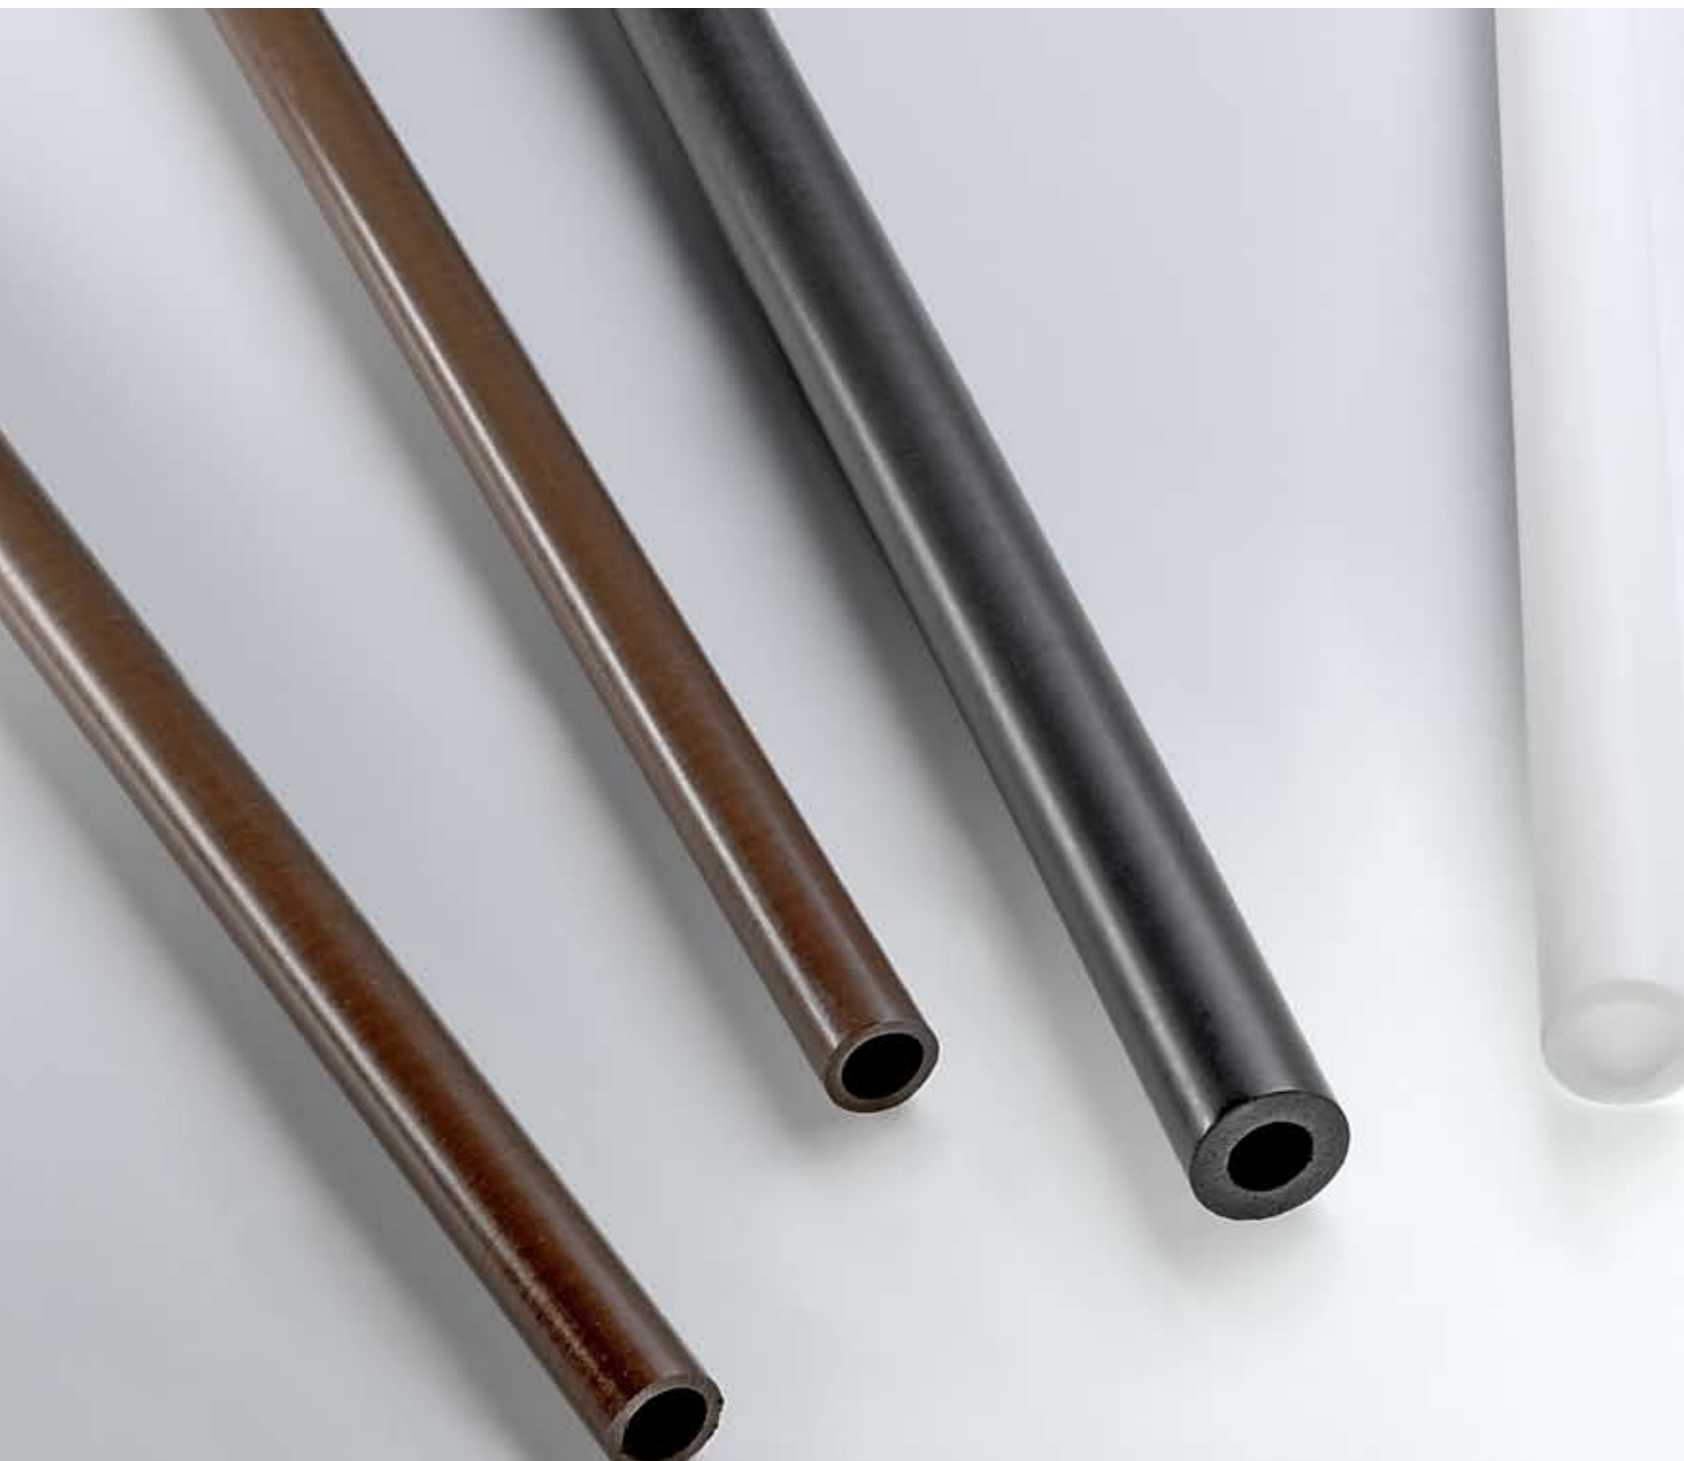

De/ Od (mm)	Diametro Interno / Internal Diameter (mm)																			
	4	6	8	10	12	14	15	18	20	22	25	30	35	40	45	50	55	60	70	80
10	155	123																		
12		203	158																	
13		248	203																	
14		297	252	194																
15			304	246																
16		405	360	303	232															
18			483	425	355															
20		666	621	563	492	409														
22			772	715	644	561	514													
25				970	899	816	769	611												
27				1158	1087		957	780	677											
30				1467	1396		1266	986	851											
33							1608	1449												
35				2055			1854	1573		1213										
38									1835											
40							2532	2373	2252	1891	1450									
45								3142	3020	2659	2218	1697								
50									3879	3518	3077	2556	1955	1259						
55										4467	4026	3505	2904	2222						
60											5868	5507	5066	4545	3943	3262	2500			
65												6196		5074	4392	3630	2788			
70													7416		6294	4851	3087			
75														8206		6162	4398			
80															10129	9006	7563	5799		
85																	9055			5206
90																				6788 4383
100																				7818
120																				15774

Peso* - Weight* (g/m)

* PTFE Vergine - Virgin PTFE

Weights are indicative and the indicated length are usually stocked.

Tolleranze* - Tolerances*		
De OD (mm)	Di ID (mm)	Lunghezza Length (mm)
+6% -0	-0 -6%	+2% -0

Virgin PTFE
ISO 13000-1 4.2.6
TOLERANCES